

Retaining Rings (Circlips)

Engineering Hardware & Fasteners · engineeringhardware.com/fastener/retaining-rings-circlips

[Fasteners](#) · [Retaining Rings](#) / Retaining Rings (Circlips)

Retaining Rings · Retaining Rings (Circlips)

70 catalogued sizes, dimensioned to DIN 471 / DIN 472. Pick any row and the technical drawing redraws to it.

Retaining Rings (Circlips) to DIN 471 / DIN 472 are catalogued in dia 3-100 mm, with dia 2.7-101.5 mm, dia 2.5-102.1 mm, thick 0.4-3 mm. 70 sizes are held in the table below, and the technical drawing redraws to whichever row you select.

Standard

DIN 471 / DIN 472

Dia

3-100 mm

Dia

2.7-101.5 mm

Dia

2.5-102.1 mm

Catalogued sizes

70

Dimensions are nominal values from the governing standard. Confirm the tolerance class for your application before ordering.



Materials & Grades

Select a material class to see the grades we supply it in. Each designation is listed with its ISO/EN, AISI/SAE, JIS and GB equivalents.

[Stainless Steel38](#)
[Carbon Steel66](#)
[Alloy Steel41](#)
[Bearing Steel5](#)
[Spring Steel25](#)
[Aluminum and Aluminum Alloys21](#)
[Brass17](#)
[Bronze11](#)
[Copper8](#)
[Titanium and Titanium Alloys18](#)
[Nickel and Nickel Alloys22](#)
[Iron-Nickel and High-Temperature Alloys10](#)
[Tool Steel and Specialty Hardened Steel9](#)
[Structural and Construction Steel9](#)

Stainless Steel

Austenitic Stainless Steel

- A1 AISI 303 · SAE 303 · SUS303 · EN 1.4305 · X8CrNiS18-9
- A2 AISI 304 · SAE 304 · SUS304 · EN 1.4301 · X5CrNi18-10 · 06Cr19Ni10
- 304L AISI 304L · SUS304L · EN 1.4307 · X2CrNi18-9 · 022Cr19Ni10
- 302 AISI 302 · SUS302 · EN 1.4310
- 305 AISI 305 · SUS305 · EN 1.4303
- A4 AISI 316 · SAE 316 · SUS316 · EN 1.4401 · X5CrNiMo17-12-2 · 06Cr17Ni12Mo2
- 316L AISI 316L · SUS316L · EN 1.4404 · X2CrNiMo17-12-2 · 022Cr17Ni12Mo2

- 321 AISI 321 · SUS321 · EN 1.4541 · X6CrNiTi18-10
- 310 / 310S AISI 310 · AISI 310S · SUS310S · EN 1.4845
- 302HQ AISI 302HQ
- A3
- A5
- 347 AISI 347 · SUS347 · EN 1.4550 · X6CrNiNb18-10
- 309 / 309S AISI 309 · AISI 309S · SUS309S

Martensitic Stainless Steel

- AISI 410 SUS410 · EN 1.4006 · X12Cr13 · 12Cr13
- AISI 420 SUS420J1 · SUS420J2 · EN 1.4021 · EN 1.4028 · 20Cr13 · 30Cr13
- AISI 431 SUS431 · EN 1.4057 · X17CrNi16-2
- C1
- C3
- C4
- AISI 440A
- AISI 440B
- AISI 440C SUS440C · EN 1.4125

Ferritic Stainless Steel

- AISI 430 SUS430 · EN 1.4016 · X6Cr17 · 10Cr17
- F1
- AISI 434
- AISI 444

Precipitation-Hardening Stainless Steel

- 17-4 PH AISI 630 · UNS S17400 · SUS630 · EN 1.4542 · X5CrNiCuNb16-4
- 15-5 PH UNS S15500
- 17-7 PH UNS S17700

Duplex and Super Duplex Stainless Steel

- Duplex 2205 UNS S31803 · UNS S32205 · EN 1.4462
- Super Duplex 2507 UNS S32750 · EN 1.4410
- D2
- D4
- D6

- D8
- Lean Duplex 2101 UNS S32101
- Super Duplex S32760 UNS S32760 · EN 1.4501

Carbon Steel

Low-Carbon Steel

- SAE 1006
- SAE 1008
- SAE 1010
- SAE 1018
- SAE 1020
- Q195
- Q235
- SAE 1012
- SAE 1015
- Q215
- ML08
- ML08AI
- ML10
- ML15
- ML20
- SWRCH6A
- SWRCH8A
- SWRCH10A
- SWRCH12A
- SWRCH15A
- SWRCH18A

Medium-Carbon Steel

- SAE 1035
- SAE 1045
- S45C
- C45
- SAE 1030
- SAE 1040

- SAE 1050
- 30
- 35
- 40
- 45
- 50
- S35C
- S40C
- S50C
- C35
- C40

High-Carbon Steel

- SAE 1060
- SAE 1070
- 65Mn
- SAE 1065
- SAE 1075
- SAE 1080
- SAE 1085
- SAE 1090
- SAE 1095
- 60
- 65
- 70
- 75
- 80
- 85

Cold-Heading Steel

- SWRCH22A
- 10B21
- SWRCH22K
- SWRCH25K
- SWRCH30K
- SWRCH35K

- SWRCH40K
- ML20Mn
- ML25
- ML30
- ML35
- ML40
- 15B25

Alloy Steel

Chromium Steel

- 40Cr
- 45Cr
- AISI 5140
- SAE 5140
- AISI 5120
- SAE 5120
- SCr420
- SCr440

Chromium-Molybdenum Steel

- 35CrMo
- 42CrMo
- AISI 4140
- SCM435
- SCM440
- 42CrMo4
- 30CrMo
- AISI 4130
- SAE 4130
- SAE 4140
- AISI 4142
- AISI 4145
- SCM415
- SCM420
- SCM445

- EN 1.7220
- EN 1.7225
- 25CrMo4
- 34CrMo4

Nickel-Chromium-Molybdenum Steel

- AISI 4340
- SAE 4340
- 40CrNiMo
- SNCM439
- EN 1.6511
- 36CrNiMo4

Boron Alloy Steel

- 10B22
- 10B21
- 15B21
- 15B25
- 20MnTiB
- 20Mn2B
- 35VB
- 40MnB

Bearing Steel

Bearing Steel

- GCr15
- AISI 52100 SAE 52100 · UNS G52986
- SUJ2
- 100Cr6 EN 1.3505
- GCr15SiMn

Spring Steel

Carbon Spring Steel

- SAE 1065

- SAE 1070
- SAE 1075
- SAE 1080
- SAE 1095
- 65
- 70
- 75
- 80
- 65Mn

Silicon-Manganese Spring Steel

- 60Si2Mn
- 60Si2MnA
- SUP6
- SUP7

Chromium-Vanadium Spring Steel

- 50CrVA
- SAE 6150
- AISI 6150
- SUP10

Stainless Spring Steel

- AISI 301
- SUS301
- EN 1.4310
- AISI 302
- AISI 304
- AISI 316
- 17-7 PH

Aluminum and Aluminum Alloys

Commercially Pure Aluminum

- 1050
- 1060

- 1070
- 1100

2xxx Series Aluminum

- 2024
- 2011
- 2014
- 2017

5xxx Series Aluminum

- 5052
- 5083
- 5754

6xxx Series Aluminum

- 6061
- 6061-T6
- 6063
- 6082
- 6082-T6

7xxx Series Aluminum

- 7075
- 7075-T6
- 7005
- 7050
- 7075-T73

Brass

Free-Cutting Brass

- C36000
- H62
- HPb59-1
- C3601
- C3602

- C3604
- CuZn36Pb3
- CuZn39Pb3
- EN CW614N
- EN CW617N
- H65

Lead-Free Brass

- C69300
- C27450
- CW510L
- CW511L

Naval Brass

- C46400
- CuZn39Sn1

Bronze

Silicon Bronze

- C65500
- C65100
- C65600

Phosphor Bronze

- C51000
- C52100
- CuSn6
- CuSn8

Aluminum Bronze

- C95400
- C95500
- C63000
- CuAl10Ni5Fe4

Copper

Copper

- C11000
- T2
- C10100
- C10200
- C12200
- T1
- TU1
- TU2

Titanium and Titanium Alloys

Commercially Pure Titanium

- Grade 2
- Grade 1
- Grade 3
- Grade 4
- TA1
- TA2
- TA3

Alpha-Beta Titanium Alloys

- Grade 5
- Ti-6Al-4V
- TC4
- UNS R56400

Low-Interstitial Grade

- Grade 23
- Ti-6Al-4V ELI
- UNS R56407

Other Titanium Fastener Alloys

- Ti-6Al-6V-2Sn
- Ti-6Al-2Sn-4Zr-2Mo
- Beta-C titanium
- Ti-10V-2Fe-3Al

Nickel and Nickel Alloys

Commercially Pure Nickel

- Nickel 200
- UNS N02200
- Nickel 201
- UNS N02201

Inconel Alloys

- Inconel 625 UNS N06625
- Inconel 718 UNS N07718
- Inconel 600 UNS N06600
- Inconel 601 UNS N06601
- Inconel 686 UNS N06686
- Inconel X-750 UNS N07750

Monel Alloys

- Monel 400 UNS N04400
- Monel K-500 UNS N05500

Hastelloy Alloys

- Hastelloy C-276 UNS N10276
- Hastelloy C-22 UNS N06022
- Hastelloy B-2 UNS N10665
- Hastelloy B-3 UNS N10675
- Hastelloy X UNS N06002

Other Nickel Alloys

- Alloy 20 UNS N08020

- Alloy 625
- Alloy 718
- Alloy 825 UNS N08825
- Alloy 925 UNS N09925

Iron-Nickel and High-Temperature Alloys

A286

- A-286
- UNS S66286
- EN 1.4980

Invar

- Invar 36
- Alloy 36
- UNS K93600
- FeNi36

Alloy 42

- Alloy 42
- UNS K94100
- FeNi42

Tool Steel and Specialty Hardened Steel

Tool Steel and Specialty Hardened Steel

- AISI D2
- AISI H13
- SKD11
- Cr12MoV
- AISI O1
- AISI A2
- AISI S7
- SKD61
- 9CrSi

Structural and Construction Steel

Structural and Construction Steel

- ASTM A36
- Q235B
- Q355B
- S355JR
- Q235C
- Q355C
- S235JR
- S275JR
- S355J2

Technical Drawing

Customize the parameters below — every spec field is editable, and the drawing redraws to match the values you choose. Changing the size will snap the other fields to that size's standard values; you can then override any individual value.

Sends the selected values to the quote form below.

Request a Quotation for Retaining Rings (Circlips)

The form below follows the current technical drawing configuration. Change the drawing values above and the request details update automatically.

Dimensions & Specifications (DIN 471 / DIN 472)

Every row below is a starting point for the customizer above — pick any size and the drawing will redraw to that row.

Nominal diameter (mm)	Ring diameter d1 (mm)	Groove diameter d2 (mm)	Thickness s (mm)	Groove depth ref (mm)	Type / standard
3	2.7	2.5	0.4	3.5	DIN 471 external
4	3.7	3.4	0.4	4.5	DIN 471 external
5	4.7	4.4	0.6	5.5	DIN 471 external
6	5.6	5.3	0.7	6.5	DIN 471 external
7	6.5	6.2	0.8	7.5	DIN 471 external
8	7.4	7.1	0.8	8.5	DIN 471 external
9	8.4	8.1	1.0	9.5	DIN 471 external
10	9.3	9.0	1.0	10.5	DIN 471 external
11	10.2	9.9	1.0	11.5	DIN 471 external
12	11.1	10.8	1.0	12.5	DIN 471 external
14	13.0	12.7	1.0	14.5	DIN 471 external
15	14.0	13.7	1.0	15.5	DIN 471 external
16	15.0	14.7	1.0	16.5	DIN 471 external
17	16.0	15.7	1.0	17.5	DIN 471 external
18	17.0	16.7	1.2	18.5	DIN 471 external
19	18.0	17.7	1.2	19.5	DIN 471 external

Nominal diameter (mm)	Ring diameter d1 (mm)	Groove diameter d2 (mm)	Thickness s (mm)	Groove depth ref (mm)	Type / standard
20	19.0	18.7	1.2	20.5	DIN 471 external
22	21.0	20.7	1.2	22.5	DIN 471 external
24	22.9	22.6	1.2	24.5	DIN 471 external
25	23.9	23.6	1.2	25.5	DIN 471 external
28	26.9	26.6	1.5	29.0	DIN 471 external
30	28.9	28.6	1.5	31.0	DIN 471 external
32	30.9	30.6	1.5	33.0	DIN 471 external
35	33.8	33.5	1.5	36.0	DIN 471 external
40	38.5	38.2	1.75	41.0	DIN 471 external
45	43.5	43.2	1.75	46.0	DIN 471 external
50	48.5	48.2	2.0	51.0	DIN 471 external
55	53.3	53.0	2.0	56.5	DIN 471 external
60	58.3	58.0	2.0	61.5	DIN 471 external
65	63.3	63.0	2.5	67.0	DIN 471 external
70	68.3	68.0	2.5	72.0	DIN 471 external
75	73.3	73.0	2.5	77.0	DIN 471 external

Nominal diameter (mm)	Ring diameter d1 (mm)	Groove diameter d2 (mm)	Thickness s (mm)	Groove depth ref (mm)	Type / standard
80	78.0	77.7	2.5	82.0	DIN 471 external
85	83.0	82.7	3.0	87.0	DIN 471 external
90	88.0	87.7	3.0	92.0	DIN 471 external
95	93.0	92.7	3.0	97.0	DIN 471 external
100	98.0	97.7	3.0	102.0	DIN 471 external
8	8.4	8.7	0.8	7.5	DIN 472 internal
9	9.4	9.7	1.0	8.5	DIN 472 internal
10	10.4	10.7	1.0	9.5	DIN 472 internal
11	11.4	11.7	1.0	10.4	DIN 472 internal
12	12.5	12.8	1.0	11.4	DIN 472 internal
13	13.5	13.8	1.0	12.4	DIN 472 internal
14	14.5	14.8	1.0	13.4	DIN 472 internal
15	15.5	15.8	1.0	14.3	DIN 472 internal
16	16.5	16.8	1.0	15.3	DIN 472 internal
17	17.5	17.8	1.0	16.3	DIN 472 internal
18	18.5	18.8	1.2	17.2	DIN 472 internal

Nominal diameter (mm)	Ring diameter d1 (mm)	Groove diameter d2 (mm)	Thickness s (mm)	Groove depth ref (mm)	Type / standard
19	19.5	19.8	1.2	18.2	DIN 472 internal
20	20.5	20.8	1.2	19.2	DIN 472 internal
22	22.5	22.9	1.2	21.2	DIN 472 internal
24	24.5	24.9	1.2	23.2	DIN 472 internal
25	25.5	25.9	1.2	24.2	DIN 472 internal
28	28.6	29.0	1.5	27.0	DIN 472 internal
30	30.6	31.0	1.5	29.0	DIN 472 internal
32	32.6	33.0	1.5	31.0	DIN 472 internal
35	35.7	36.1	1.5	34.0	DIN 472 internal
40	40.8	41.3	1.75	39.0	DIN 472 internal
45	45.8	46.3	1.75	44.0	DIN 472 internal
50	51.0	51.5	2.0	49.0	DIN 472 internal
55	56.0	56.5	2.0	54.0	DIN 472 internal
60	61.0	61.5	2.0	59.0	DIN 472 internal
65	66.2	66.8	2.5	64.0	DIN 472 internal
70	71.2	71.8	2.5	69.0	DIN 472 internal

Nominal diameter (mm)	Ring diameter d1 (mm)	Groove diameter d2 (mm)	Thickness s (mm)	Groove depth ref (mm)	Type / standard
75	76.2	76.8	2.5	74.0	DIN 472 internal
80	81.2	81.8	2.5	79.0	DIN 472 internal
85	86.5	87.1	3.0	84.0	DIN 472 internal
90	91.5	92.1	3.0	89.0	DIN 472 internal
95	96.5	97.1	3.0	94.0	DIN 472 internal
100	101.5	102.1	3.0	99.0	DIN 472 internal

Retaining Rings (Circlips) are retaining rings manufactured to DIN 471 / DIN 472. This page lists the full dimensional range with the key specifications engineers need to select and specify them.

What Are Retaining Rings (Circlips)?

Retaining Rings (Circlips) are retaining rings defined by DIN 471 / DIN 472. They are selected by shaft / bore diameter and the dimensional characteristics shown below, and are available in a range of materials and finishes to suit the application and environment.

Materials & Finishes

Common materials include carbon steel (typically zinc plated or hot-dip galvanized), hardened or case-hardened steel where wear matters, and stainless steel A2 (304) or A4 (316) for corrosion resistance. Specify the material, hardness where relevant, and the surface finish appropriate to your application and environment.

Typical Applications

Axial retention of bearings, gears and shafts in housings and on shafts. [Read the full application guide for Retaining Rings \(Circlips\)](#)
→

Pricing

Retaining Rings (Circlips) are supplied to order. Pricing starts from approximately US\$0.030 per piece for standard sizes in carbon steel; final pricing depends on size, material, finish and order quantity (MOQ applies). Submit your exact configuration with the

quote form above.

Inside the plant

Manufactured in our own plant

This part is cold-formed, threaded, heat-treated and finished in-house. The stages below are where its class and finish are actually decided.

1.



01

Cold heading

Wire rod is drawn to size and cold-formed into blanks. Forming rather than cutting keeps the grain flow continuous around the head, which is where a bolt is most likely to fail.

Head dimensions and under-head radius checked at set-up and per shift.



2.

02

Thread rolling

Threads are rolled between hardened dies rather than cut. Rolled threads are stronger in fatigue than cut threads and hold pitch and flank angle far more consistently across a batch.

Go / no-go ring gauges to ISO 965 tolerance class 6g.

3.



03

Heat treatment

Quench-and-temper brings carbon and alloy steel to the property class ordered — 8.8, 10.9 or 12.9 — with the furnace charge tracked so a finished lot can be traced back to it.

Core hardness and tensile tested per lot to ISO 898-1.

4.




04

Surface treatment

Zinc, zinc-nickel, hot-dip galvanizing, black oxide, phosphate and Dacromet, selected against the service environment rather than against the price list.

Coating thickness and neutral salt spray hours to ISO 9227.

Video: Retaining Rings (Circlips)

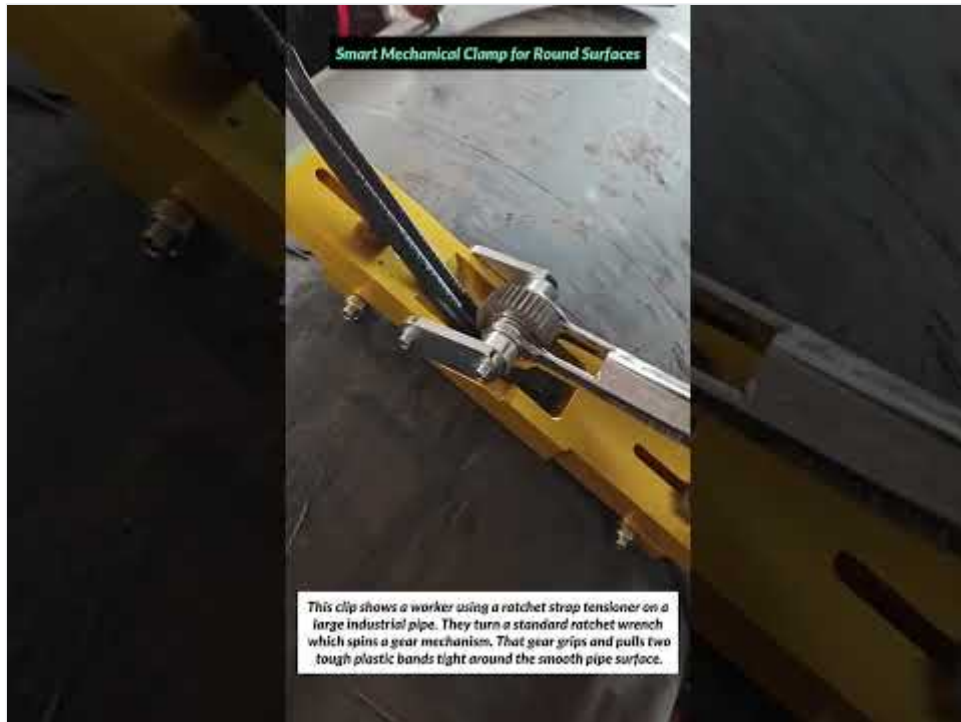

► Watch video: <https://www.youtube.com/watch?v=UyuMDN8pi5g>

Third-party video, selected automatically for this topic. It is not produced by Engineering Hardware and is not a specification source — use the tables on this page for dimensional data.

Frequently Asked Questions

Which standard governs Retaining Rings (Circlips)?

Retaining Rings (Circlips) are manufactured to DIN 471 / DIN 472. The dimensional values on this page follow that standard.

What is the size range of Retaining Rings (Circlips)?

The table on this page lists 70 sizes for Retaining Rings (Circlips), ranging from 3 to 100. Sizes outside the table can be quoted on request.

In which materials are Retaining Rings (Circlips) supplied?

Retaining Rings (Circlips) are supplied in spring steel, with finishes including zinc plating, hot-dip galvanizing and black oxide. Choose material and finish to suit the load and the service environment for Retaining Rings (Circlips).

How do I request a quotation?

Use the parametric drawing on this page to set the exact configuration (size, material, finish) and click "Request this configuration" — a specialist from Engineering Hardware will respond within one business day.

More Retaining Rings

← Previous E-Clips (External Snap Rings) DIN 6799 Next → Retaining Ring (Circlip) — ISO / DIN (Series 147) ISO / DIN